



Graver Technologies

Filtration | Separation | Purification

QXL™ Polypropylene Filter Series

Absolute Rated Filtration for Inks, Slurries and Coatings

With its extra-loft, extra-life depth filter configuration, the QXL is designed for the filtration of industrial solutions containing agglomerated particles and gels or with high viscosity. Consistent absolute retention performance is achieved throughout the pleated, serialized microfiber matrix. The state-of-the-art optimized structure provides significantly higher flow rates and throughputs than cylindrical melt blown filters.

Filter Features-Benefits

- Hybrid pleated depth construction combines graded pore structure with high surface area.
- Constructed entirely of polypropylene – Compatible with a broad range of solutions and chemicals
- Optimized pleat configuration – Provides the ideal combination of retention, flow rate and throughput
- Excellent gel and agglomerated particle retention reduces defects
- Available in common end cap configurations – Retrofits easily into most filter housings
- FDA listed materials of construction
- Meets USP Class VI Biological test for plastics


Filter Specifications

Materials

Media:	Polypropylene
Core, Cage, End Caps:	Polypropylene
Gaskets/O-Rings:	Silicone, Viton, EPDM, Buna, Teflon encapsulated Viton (O-Rings only)
Micron Ratings:	0.45, 0.5, 1, 3, 5, 10, 20, 40 μ m

Dimensions and Operating Parameters

Typical nominal lengths:	9.75", 10", 20", 30", 40" 24.8, 25.4, 50.8, 76.2, 101.6 cm
Outside Diameter:	2.7" (6.86 cm)
Inside Diameter:	1.1" (2.79 cm)
Maximum Operating Temperature:	176°F (80°C)
Maximum Differential Pressure:	75 psid @ 70°F (5.2 bar @ 21°C) 40 psid @ 176°F (2.8 bar @ 80°C)
Maximum Reverse Differential Pressure:	35 psid @ 80°F (2.4 bar @ 27°C)
Recommended Change-out pressure:	35 psid (2.43 bar)
Sterilization:	Cartridges may be autoclaved for 30 minutes at 250°F (121°C) under no end load conditions. May be in-line sanitized with 185°F (85°C) hot water— do not exceed 3 psid.

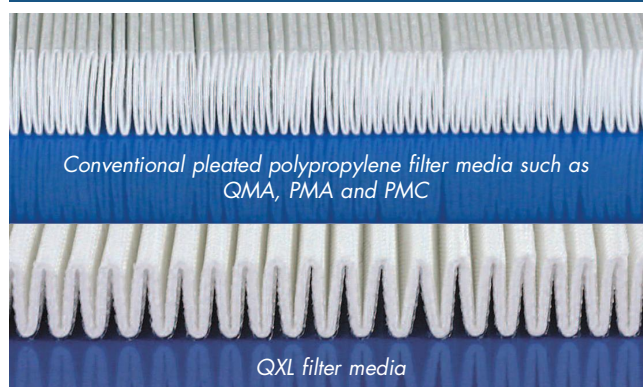

Applications

- Inks
- CMP P-O-U and bulk slurries
- Adhesives
- Paints
- Beverages
- Coatings


Filter Removal Efficiency

Beta Ratio Efficiency	Beta 1000 99.9%	Beta 100 99%	Beta 50 98%
0.45 micron	0.45	0.3	0.2
0.5 micron	0.65	0.45	0.3
1 micron	1.5	0.8	0.6
3 microns	3	2	1
5 microns	5	4	3
10 microns	10	8	7
20 microns	20	19	17
40 microns	40	35	25

QXL Nomenclature Information

<p>QXL</p> <p>Filter Type QXL Series Filters</p>	<p>5</p> <p>Retention Rating (microns)</p> <p>0.45* 0.5** 1 3 5 10 20 40</p> <p><small>* Special CMP slurry formulation. ** Special ink formulation.</small></p>	<p>-10</p> <p>Nominal Length (inches)</p> <p>-9.75 -10 -20 -30 -40</p>	<p>P8</p> <p>End Configuration</p> <p>P Double Open End P2 226/Flat Single Open End P3 222/Flat Single Open End P7 226/Fin Single Open End P8 222/Fin Single Open End AM Single open end, internal O-Ring</p>
			<p>S</p> <p>Gasket or O-Ring</p> <p>S Silicone B Buna-N E EPDM V Viton T Teflon encap. Viton (O-Rings only)</p>

Example: QXL 5-10 P8S

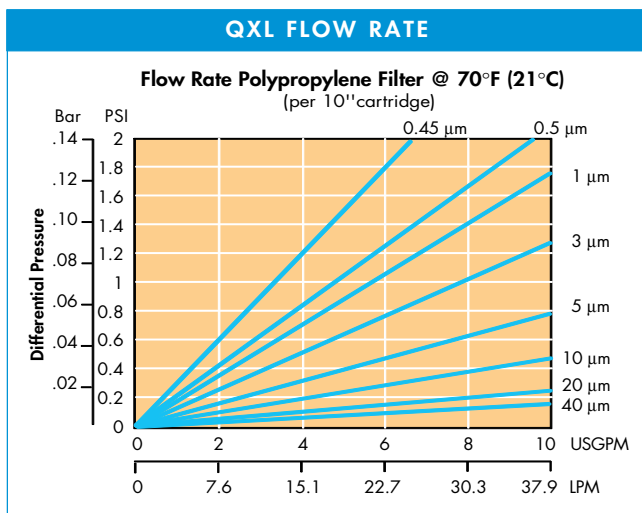

HENNLICH GmbH & Co KG

Alfred-Kubin-Straße 9 a-c
A-4780 Schärding
Tel. +43 7712 3163-0
Fax +43 7712 3163-24

filtertechnik@hennlich.at
www.hennlich.at